

US

PCT Applicant's Guide - Volume II - National Chapter - U.S.

Annex US.II, page 1

Express Mail No. EM560647802US

FORM PTO-1390
(REV 10-95)

U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE ATTORNEY DOCKET NUMBER

TRANSMITTAL LETTER TO THE UNITED STATES
DESIGNATED/ELECTED OFFICE (DO/EO/US)
CONCERNING A FILING UNDER 35 U.S.C. 371

51876.P194

U.S. APPLICATION NO. (If known, see 37 CFR 1.5)

INTERNATIONAL APPLICATION NO.
PCT/KR99/00765INTERNATIONAL FILING DATE
December 8, 1999PRIORITY DATE CLAIMED
12/8/98

TITLE OF INVENTION

METHOD AND APPARATUS FOR EXPANDING CELL COVERAGE IN MOBILE COMMUNICATIONS

APPLICANT(S) FOR DO/EO/US

Jun-Woo Lee; Byung-Jin Ko; Ha-Jae Jung

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☐ This express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b)) and PCT articles 22 and 39(1).
4. ☐ A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.
5. ☒ A copy of the International Application as filed (35 U.S.C. 371(c)(2)).
 - a. ☒ is transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☐ has been transmitted by the International Bureau.
 - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☒ A translation of the International Application into English (35 U.S.C. 371(c)(2)).
7. ☐ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3)).
 - a. ☐ is transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☐ have been transmitted by the International Bureau.
 - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
 - d. ☐ have not been made and will not be made.
8. ☐ A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
9. ☒ An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).
10. ☐ A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).

Items 11. to 16. below concern document(s) or information included:

11. ☐ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
12. ☒ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
13. ☐ A **FIRST** preliminary amendment.
☐ A **SECOND** or **SUBSEQUENT** preliminary amendment.
14. ☐ A subsequent specification.
15. ☐ A change of power of attorney and/or address letter.
16. ☐ Other items or information:

Submission of Formal Drawings cover and formal drawings; Request for priority; copy of the PCT request; copy of the search report;

Annex US.II, page 2 PCT Applicant's Guide - Volume II - National Chapter - US

534 Rec'd PCT/PTO 08 AUG 2000
1 Chapter - US

U.S. APPLICATION NO. (if known, see 37 CFR 1.5) 09/622020		INTERNATIONAL APPLICATION NO. PCT/KR99/00765		ATTORNEY'S DOCKET NUMBER 51876.P194																																																				
17. <input type="checkbox"/> The following fees are submitted: BASIC NATIONAL FEE (37 CFR 1.492 (a) (1) - (5)): Neither international preliminary examination fee (37 CFR 1.482 nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by EPO or JPO \$970.00 International preliminary examination fee (37CFR1.482)not paid to USPTO but International Search Report prepared by the EPO or JPO.... \$840.00 International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee paid to USPTO (37 CFR 1.445(a)(2)) \$760.00 International preliminary examination fee paid to USPTO (37 CFR 1.482) but all claims did not satisfy provisions of PCT Article 33(1)-(4) \$670.00 International preliminary examination fee paid to USPTO (37 CFR 1.482) and all claims satisfied provisions of PCT Article 33(1)-(4) \$96.00 ENTER APPROPRIATE BASIC FEE AMOUNT = Surcharge of \$130.00 for furnishing the oath or declaration later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(e)). <table border="1" style="width:100%; border-collapse: collapse;"><thead><tr><th style="width:33%;">CLAIMS</th><th style="width:33%;">NUMBER FILED</th><th style="width:33%;">NUMBER EXTRA</th><th style="width:33%;">RATE</th></tr></thead><tbody><tr><td>Total claims</td><td>27 - 20 =</td><td>7</td><td>X \$18.00</td></tr><tr><td>Independent claims</td><td>7 - 3 =</td><td>4</td><td>X \$78.00</td></tr><tr><td colspan="3">MULTIPLE DEPENDENT CLAIM(S) (if applicable)</td><td>+ \$260.00</td></tr><tr><td colspan="3">TOTAL OF ABOVE CALCULATIONS =</td><td>\$ 1278.00</td></tr><tr><td colspan="3">Reduction of 1/2 for filing by small entity, if applicable. Verified Small Entity Statement must also be filed (Note 37 CFR 1.9, 1.27, 1.28).</td><td>\$</td></tr><tr><td colspan="3">SUBTOTAL =</td><td>\$ 1278.00</td></tr><tr><td colspan="3">Processing fee of \$130.00 for furnishing the English translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(f)).</td><td>\$</td></tr><tr><td colspan="3">TOTAL NATIONAL FEE =</td><td>\$ 1278.00</td></tr><tr><td colspan="3">Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property</td><td>+ \$ 40.00</td></tr><tr><td colspan="3">TOTAL FEES ENCLOSED =</td><td>\$ 1318.00</td></tr><tr><td colspan="3" rowspan="2"></td><td>\$ Amount to be refunded</td><td>\$</td></tr><tr><td>charged</td><td>\$</td></tr></tbody></table>				CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE	Total claims	27 - 20 =	7	X \$18.00	Independent claims	7 - 3 =	4	X \$78.00	MULTIPLE DEPENDENT CLAIM(S) (if applicable)			+ \$260.00	TOTAL OF ABOVE CALCULATIONS =			\$ 1278.00	Reduction of 1/2 for filing by small entity, if applicable. Verified Small Entity Statement must also be filed (Note 37 CFR 1.9, 1.27, 1.28).			\$	SUBTOTAL =			\$ 1278.00	Processing fee of \$130.00 for furnishing the English translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(f)).			\$	TOTAL NATIONAL FEE =			\$ 1278.00	Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property			+ \$ 40.00	TOTAL FEES ENCLOSED =			\$ 1318.00				\$ Amount to be refunded	\$	charged	\$	CALCULATIONS FOR PTO USE ONLY	
CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE																																																					
Total claims	27 - 20 =	7	X \$18.00																																																					
Independent claims	7 - 3 =	4	X \$78.00																																																					
MULTIPLE DEPENDENT CLAIM(S) (if applicable)			+ \$260.00																																																					
TOTAL OF ABOVE CALCULATIONS =			\$ 1278.00																																																					
Reduction of 1/2 for filing by small entity, if applicable. Verified Small Entity Statement must also be filed (Note 37 CFR 1.9, 1.27, 1.28).			\$																																																					
SUBTOTAL =			\$ 1278.00																																																					
Processing fee of \$130.00 for furnishing the English translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(f)).			\$																																																					
TOTAL NATIONAL FEE =			\$ 1278.00																																																					
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property			+ \$ 40.00																																																					
TOTAL FEES ENCLOSED =			\$ 1318.00																																																					
			\$ Amount to be refunded	\$																																																				
			charged	\$																																																				

a. ☒ A check in the amount of \$ 1318.00 to cover the above fees is enclosed.

b. ☐ Please charge my Deposit Account No. _____ in the amount of \$ _____ to cover the above fees.
A duplicate copy of this sheet is enclosed.

c. ☒ The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. 022666. A duplicate copy of this sheet is enclosed.

NOTE: Where an appropriate time limit under 37 CFR 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.

SEND ALL CORRESPONDENCE TO:

Blakely, Sokoloff, Taylor & Zafman LLP
12400 Wilshire Blvd. 7th Floor
Los Angeles, CA 90025-1026

SIGNATURE

Eric S. Hyman
NAME

30,139
REGISTRATION NUMBER

09/622020
534 Rec'd PCT/PTO 08 AUG 2000
Our Ref.: 51876.P194
Express Mail No. EM560647802US

IN THE UNITED STATES PATENT AND TRADEMARK

In re application of:)
Jun-Woo Lee et al.)
For: METHOD AND APPARATUS FOR)
EXPANDING CELL COVERAGE IN MOBILE)
COMMUNICATIONS SYSTEMS)
_____)

SUBMISSION OF FORMAL DRAWINGS

Hon. Commissioner of Patents and Trademarks
Washington, D.C. 20231


Dear Sir:

Submitted herewith are formal drawings, Figures 1-8.

Respectfully submitted,

BLAKELY, SOKOLOFF, TAYLOR & ZAFMAN

Dated: 8/8/2000



Eric S. Hyman, Reg. No. 30,139

12400 Wilshire Boulevard
Seventh Floor
Los Angeles, California 90025
(310) 207-3800

FIG. 1

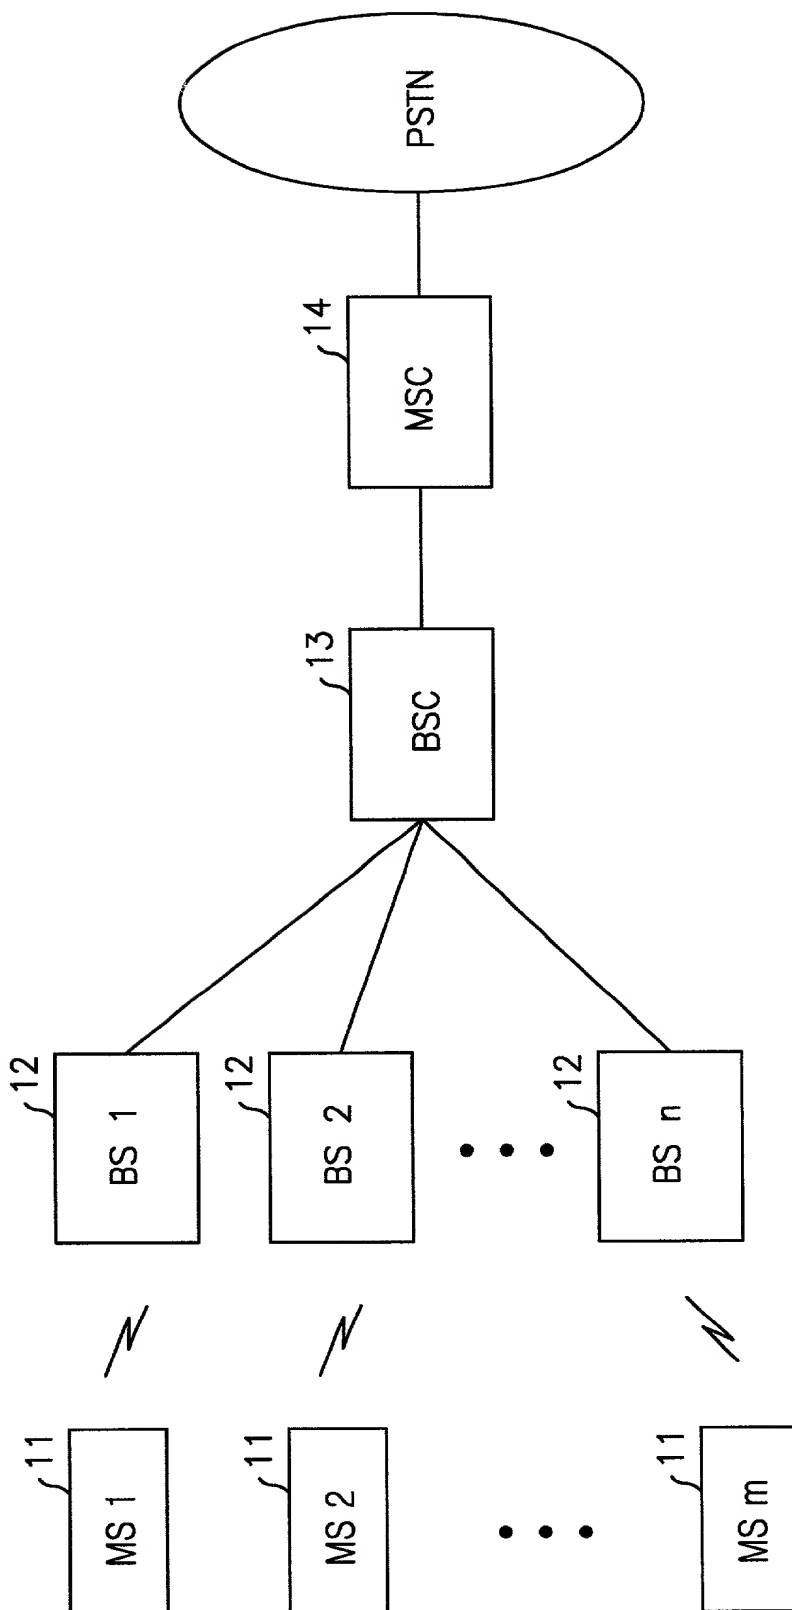


FIG. 2

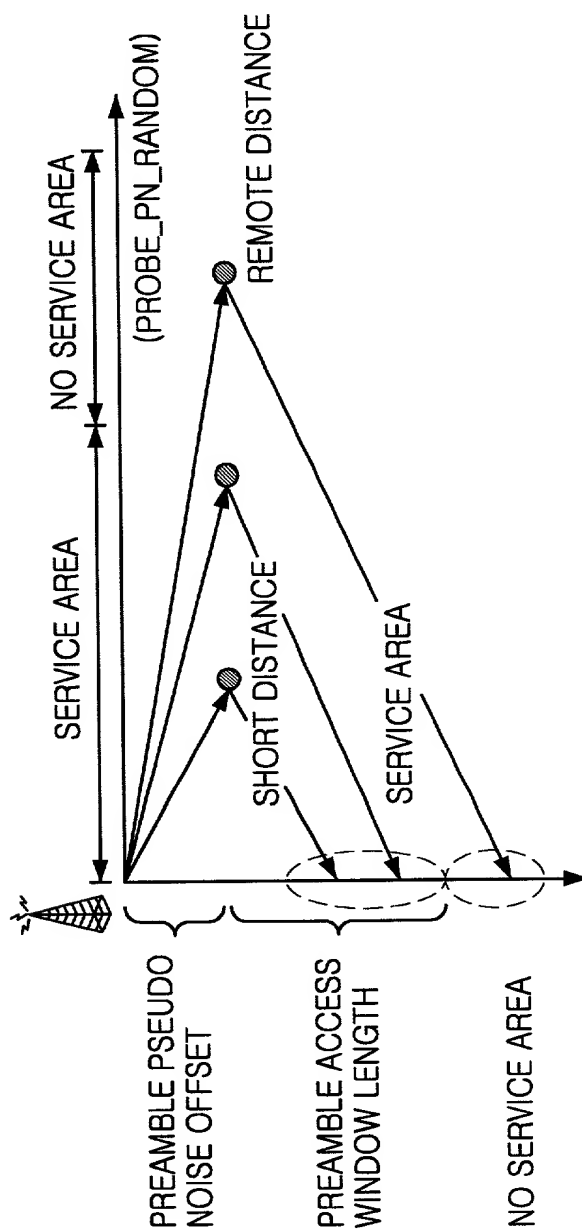


FIG. 3A

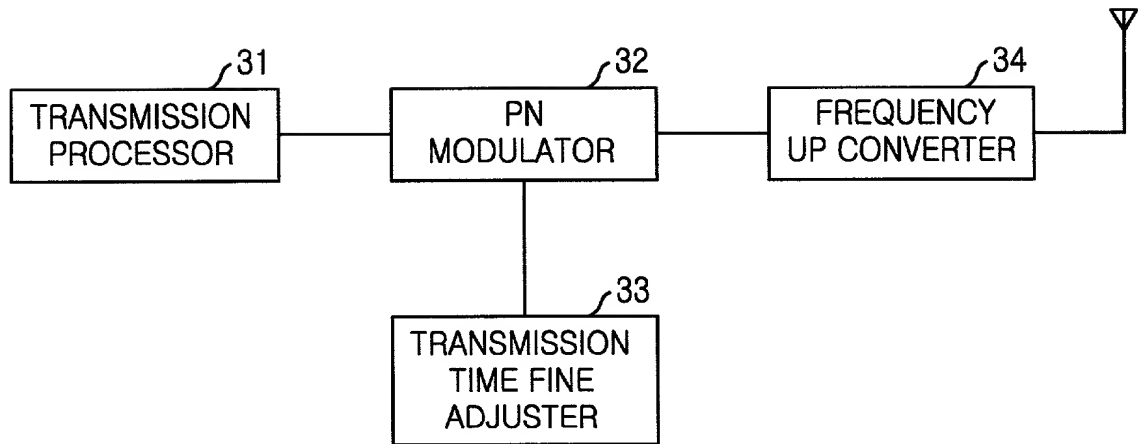


FIG. 3B

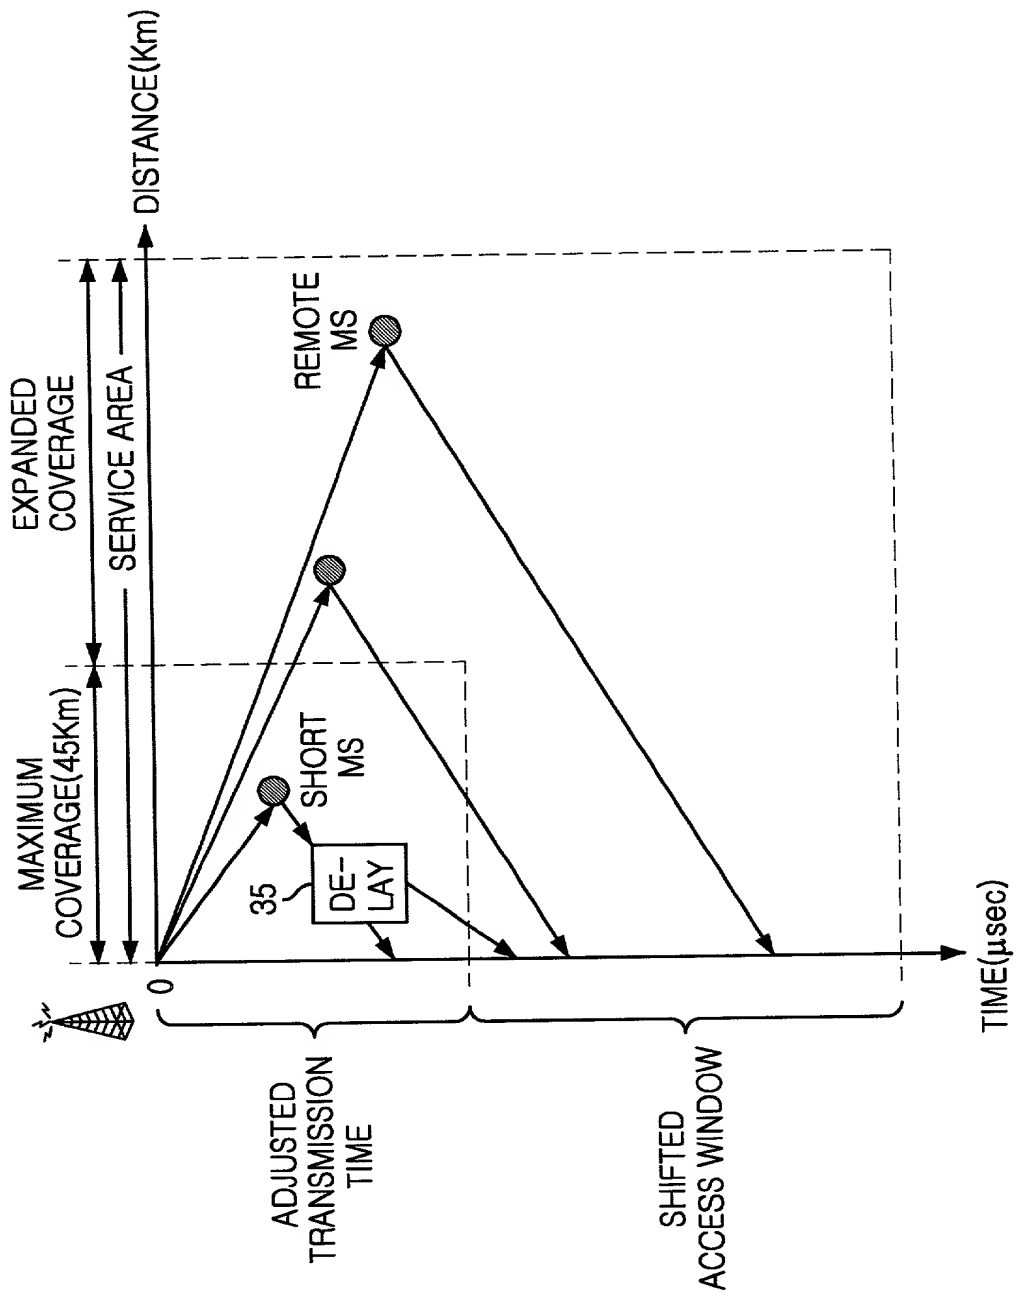


FIG. 4

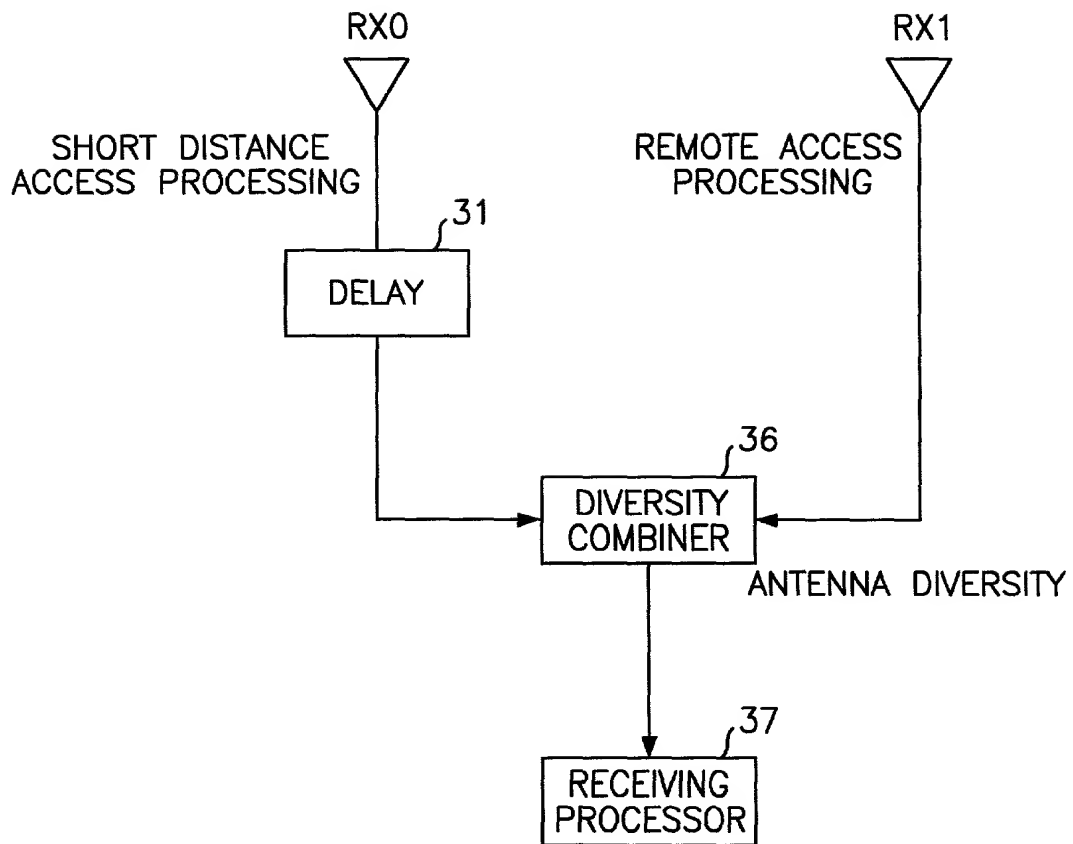


FIG. 5

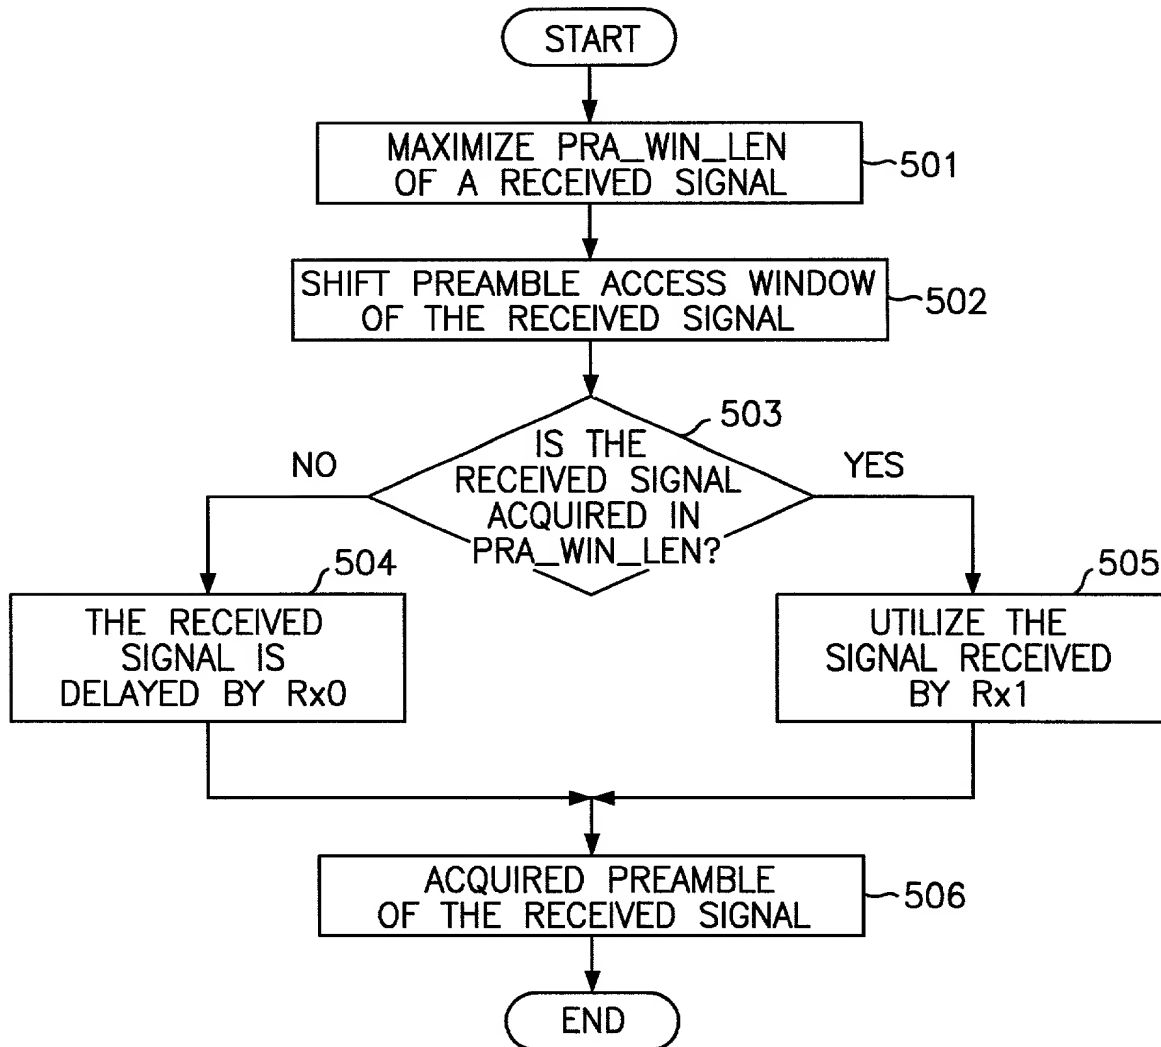


FIG. 6A

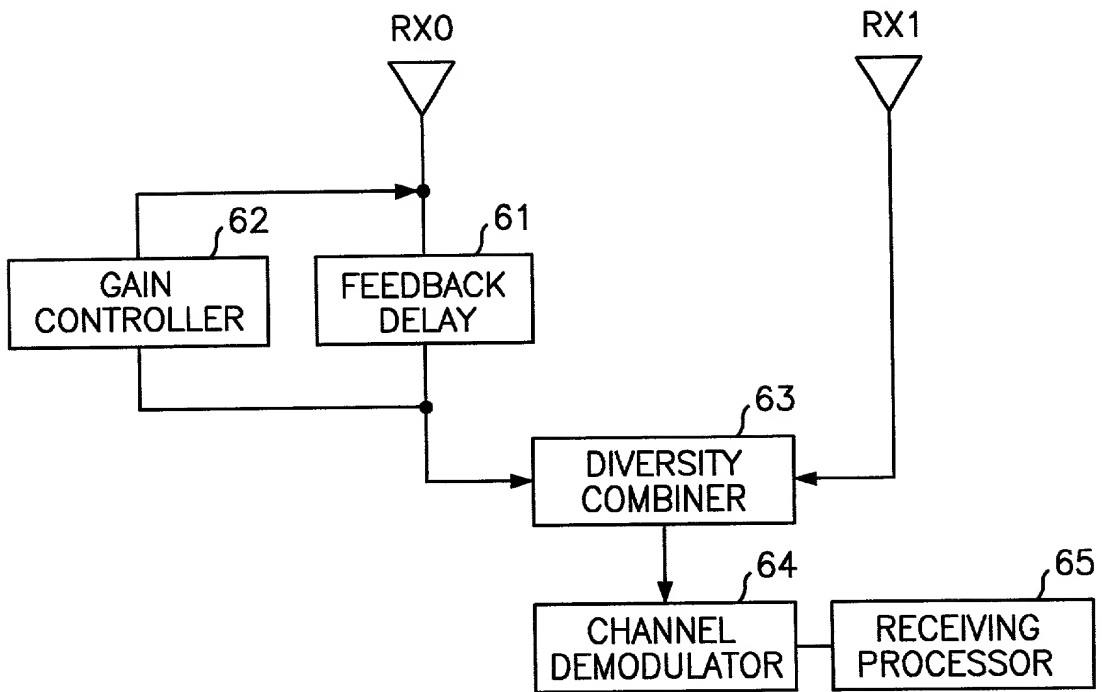


FIG. 6B

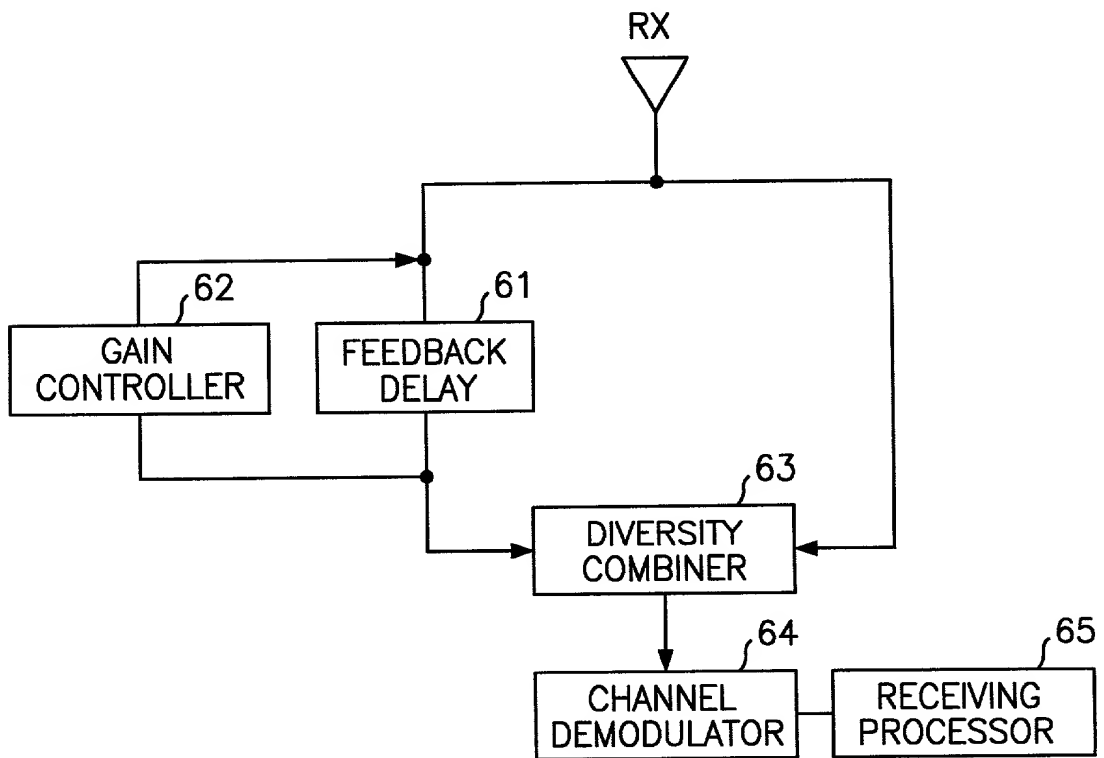


FIG. 7A





FIG. 7B








FIG. 7C

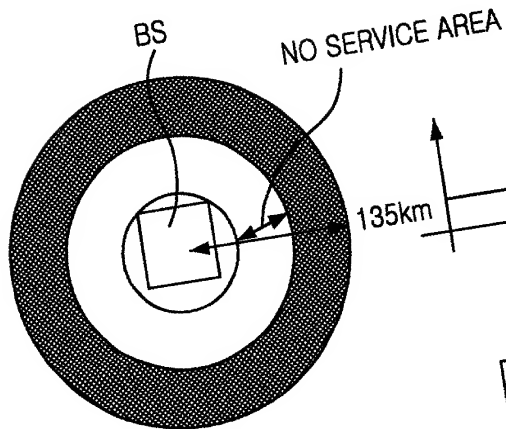

-  SERVICE AREA BY RX0
-  SERVICE AREA BY RX0 & RX1
-  SERVICE AREA BY RX1

09/622020

FIG. 8

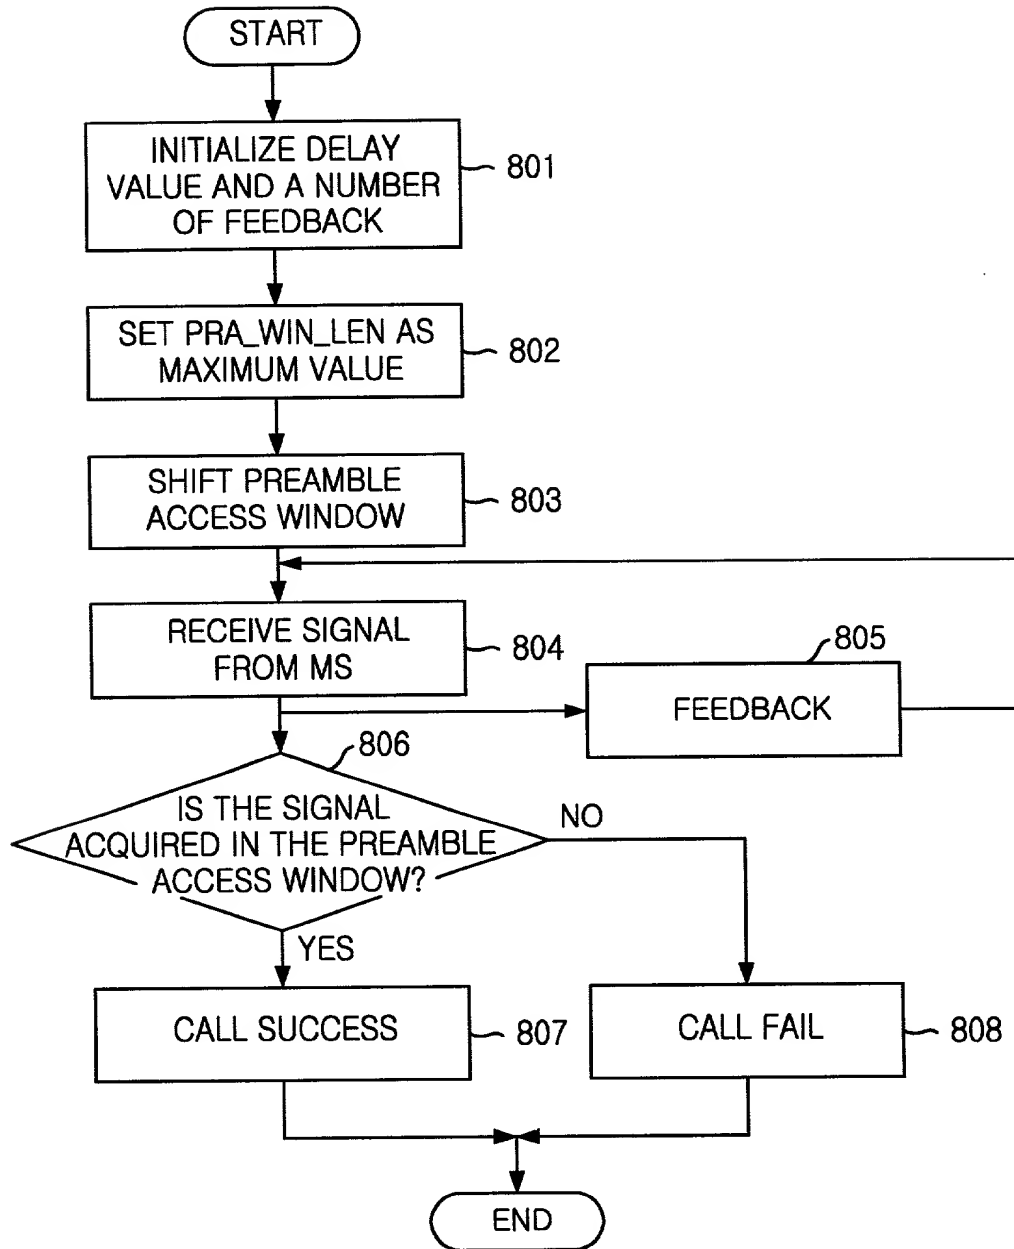

534 Rec'd PCT/PTO 08 AUG 2000

METHOD AND APPARATUS FOR EXPANDING CELL COVERAGE
IN MOBILE COMMUNICATION SYSTEM

5 Field of the Invention

The present invention relates to a method and apparatus for expanding cell coverage in a mobile communication system; and more particularly, relates to a method and apparatus for expanding cell coverage by advancing a transmission signal and selectively delaying a received signal in code division multiple access (CDMA) system.

15 Prior Art of the Invention

Fig. 1 shows a general CDMA mobile communication system.

A mobile station (MS) 11 communicates a call setup signal and a traffic signal with a base station (BS) 12 through a radio path and performs signal processing function for speech conversion and called/calling speech.

The BS 12 performs communication of the call setup signal and the traffic signal with the MS 11 through the radio path and a call control function. The BS 12 is coupled to a base station controller (BSC) 13 with a wired line and transmits the call setup and the traffic signals from the MS 11 to the BSC 13 and message from the BSC 13 to the MS 11. Also, the BS 12 performs a signal processing function for communication with the BSC 13 and maintenance function. The BS 12 provides services in at least one or more sectors in which a cell is divided a certain number of sectors.

The BSC 13 is coupled to a plurality of the BSs 12 and a mobile switching center (MSC) 14. The BSC 13 performs called/calling processing and handoff of the call, and

management and maintenance of the BS.

The MSC 14 is coupled to the BSC 13, a public switching telecommunication network (PSTN) and another MSC 14. The MSC 14 performs called/calling processing, handoff and management/maintenance for a mobile communication system.

In a general mobile communication system, a plurality of the base stations 12 are placed in a service area having a plurality of cells, regarding efficient frequency allocation and power consume etc. The cell serviced by one BS 12 includes a certain number of sectors. When the MS 11 moves to another sector or another cell on calling, the MS 11 is continuously connected to another base station 12 or a radio channel of another sector (which is referred to 'handoff').

Hereinafter, access parameters between the MS and the BS in the general mobile communication system will be described.

Since a signal delayed by approximately 1.5 or more Walsh symbol (cell radius of 45Km) cannot be participated in demodulation, size of the access parameter for access probe is limited.

Preamble size means a size of preamble contained in a access channel slot. Here, a minimum length of one access channel slot is 4 frames and a maximum length is 26 frames. The preamble size is between 1 and 16 frame(s).

When increasing the preamble size, the BS 12 can accurately capture access of the BS. Also, a length of the preamble access window can be increased, and then a preamble integration period can be reduced. However, overhead is increased, thereby there are some problems that a call setup time is increased and a size of message capsule of the access probe can be reduced. Here, the length of the

preamble access window means a size of a search window when the BS 12 detects the preamble of the access probe. The length of the preamble access window ranges from 1 to 3072, in other words, 1/8 pseudo noise chip.

5 If a round trip delay (RTD) of a signal is 1.5 or more Walsh symbol, the BS 12 cannot process the signal, thereby the RTD being limited to the maximum 384 chips. Here, one (1) Walsh equals to 256 chips. Therefore, when the preamble access window size is large, though a preamble pseudo noise
10 random delay is large, the preamble can be detected and radius of reverse coverage can be increased. However, the preamble integration period should be short, thereby detection of accurate preamble being difficult.

 The preamble integration period means time necessary to
15 search an access probe from the MS 11 in an access channel. If the preamble integration period is small, it is difficult an accurate preamble to be detected. However, the length of preamble access window can be increased because of reduction of preamble searching time. Therefore, in order to
20 accurately search the preamble by enlarging the preamble integration period, the length of the preamble access window should be reduced, or the size of the preamble should be enlarged.

 A base station channel card includes four base station
25 demodulators (BSD). A combiner performs software combining by interrupting its operation at every 1 Walsh symbol on basis of a global positioning system (GPS) time and reading symbols from the four BSDs.

 Here, each of the BSD demodulates a signal received
30 through a different path, which arriving time of the signal is different from each other. Therefore, a finger of the BSD cannot demodulate a signal delayed by deskewing time or more

than. In other words, the remote MS more than 1.5 Walsh chip distance cannot access to the BS. The reason is that the signal delayed by the deskewing time can have a different value from a desired signal in case of 1.5 or more than 5 Walsh symbols (PN 384 chips or a radius of 45km).

Therefore, when demodulating, the window size for detecting the access probe of the MS 11 is limited to PN 384 chips, and then a radius of service area of the BS 12 is limited to about 45km.

10 Most effective one to the cell coverage of the BS 12 in parameters for detecting a call access from the MS 11 is the window size for access probe of the MS 11. Here, the window size is determined according to a preamble pseudo noise offset PRA_PN_Offset and the length of the preamble access 15 window PRA_WIN_LEN.

The preamble pseudo noise offset PRA_PN_Offset means an initial value of pseudo noise (PN) offset searched by the BS 12 when the BS 12 searches the preamble of the channel access probe, and a minimum processing delay time of the MS 20 11 and the BS 12. The preamble pseudo noise offset ranges from 0 to 3072 PN chip(s).

The length of the preamble access window PRA_WIN_LEN means the size of the searching window when the BS 12 detects the preamble of the access probe. The length of the 25 preamble access window ranges from 1 to 3072 PN chip(s).

The access probe timing is illustrated in Fig. 2.

Fig. 2 is a timing diagram illustrating access probe timing in the BS in accordance with the prior art.

When the BS transmits the signal to the MS, if the MS 30 locates within the service coverage of the BS, in other words, if the MS is a short distant or a middle distance from the BS, a round trip delay is acquired within the

preamble access window, thereby a call can be set. However, if the MS is a remote distance from the BS, the round trip delay cannot be acquired within the preamble access window, thereby the call cannot be set. As can be seen, if the MS is
5 a remote distance from the BS so that the round trip delay of the signal is not acquired, even though a received power is large enough, a communication service can not be provided.

As mentioned above, if the cell radius in which reverse access probe can be performed is large in a conventional
10 CDMA system and the round trip delay of the signal is large, in other words, the call timing is out of the window size, a call cannot be done.

Therefore, the radius of the cell coverage is limited to about 45 Km in the conventional CDMA system.

15

Summary of the Invention

It is an object to provide a method and apparatus for expanding cell coverage by advancing a transmitting signal
20 and selectively delaying a received signal in a mobile communication system.

In accordance with an aspect of the present invention, there is provided a method for expanding cell coverage in mobile communication system comprising the steps of: a)
25 shifting a preamble access window by advancing a transmission signal by a first delay time in order to acquire a first call access signal from a mobile station at a remote distance; and b) delaying a second call access signal from a mobile station at a short distance by a second
30 delay time in order to acquire the second call access signal.

In accordance with another aspect of the present invention, there is provided a method for expanding cell

coverage in mobile communication system including at least a base station and a plurality of mobile stations, the method comprising the steps of: a) expanding a length of a current preamble access window to a predetermined value; b) 5 determining the mobile station is within a cell coverage covered by the preamble access window; c) shifting the preamble access window by advancing a transmission signal by a first delay time in order to acquire at least a mobile station when the mobile station is out of the cell coverage; 10 and d) delaying a second call access signal from a mobile station at a short distance in order to acquire the second call access signal.

In accordance with further another aspect of the present invention, there is provided an apparatus for 15 expanding cell coverage in mobile communication system including a plurality of mobile stations and at least a base station, comprising: transmitting means for transmitting a transmission signal advanced by a first delay time in order to acquire the transmission signal from a mobile station at 20 a remote distance; and receiving means for receiving and delaying a received signal from a mobile station at a short distance by a second delay time in order to acquire the received signal.

In accordance with still another aspect of the present 25 invention, there is provided a method for expanding cell coverage applied to a mobile communication system, the method comprising the steps of: a) expanding a length of a current preamble access window to a maximum value; b) setting operation parameters related to time advance in 30 order to acquire a first call access signal from a mobile station at a remote distance when the mobile station is out of the cell coverage; and c) acquiring a second call access

signal from a mobile station at a short distance within the preamble access window by delaying the second call access signal.

In accordance with still another aspect of the present invention, there is provided a method for expanding cell coverage applied to a mobile communication system, the method comprising the steps of: a) expanding a length of a current preamble access window for access probe to a maximum value; b) shifting the preamble access window by setting operation parameters in order to acquire a first call access signal from a mobile station at a remote distance when the mobile station is out of the expanded preamble access window; and c) acquiring a second call access signal from a mobile station at a short distance within the preamble access window by delaying the second call access signal by a feedback delay which makes the second call access signal have a different delay value on basis of a distance between a location of the mobile station and a location on a cell radius.

In accordance with still another aspect of the present invention, there is provided a computer readable media storing a method for expanding cell coverage applied to a mobile communication system, the method comprising the steps of: a) expanding a length of a current preamble access window to a maximum value; b) setting operation parameters in order to acquire a first call access signal from a mobile station at a remote distance when the mobile station is out of the cell coverage; and c) acquiring a second call access signal from a mobile station at a short distance within the preamble access window by delaying the second call access signal.

In accordance with still another aspect of the present

invention, there is provided a computer readable media storing a method for expanding cell coverage applied to a mobile communication system, the method comprising the steps of: a) expanding a length of a current preamble access window for access probe to a maximum value; b) shifting the preamble access window by setting operation parameters in order to acquire a first call access signal from a mobile station at a remote distance when the mobile station is out of the expanded preamble access window; and c) acquiring a second call access signal from a mobile station at a short distance within the preamble access window by delaying the second call access signal by a feedback delay which makes the second call access signal have a different delay value on basis of a distance between a location of the mobile station and a location on a cell radius.

Brief Description of the Drawings

The above and other objects and features of the instant invention will become apparent from the following description of preferred embodiments taken in conjunction with the accompanying drawings, in which:

Fig. 1 is a diagram of a general CDMA mobile communication system;

Fig. 2 is a timing diagram illustrating access probe timing in the BS in accordance with the prior art;

Fig. 3A is a block diagram of a transmitting unit in accordance with an embodiment of the present invention;

Fig. 3B is a diagram illustrating a method for expanding a cell coverage using an adjusted transmission time and a delay element in accordance with an embodiment of the present invention;

Fig. 4 is a block diagram of a receiving unit having a delay in a reverse link in accordance with an embodiment of the present invention;

Fig. 5 is a flow chart illustrating a method for expanding a cell coverage in accordance with an embodiment of the present invention;

Figs. 6A and 6B are block diagrams of receiving units having feedback delays in accordance with other embodiments of the present invention;

Fig. 7A to 7C are explanative diagrams illustrating a method for expanding a cell coverage by using a feedback delay in accordance with another embodiment of the present invention; and

Fig. 8 is a flow chart illustrating a method for expanding a cell coverage by using a feedback delay.

Modes for Carrying Out the Invention

Hereinafter, preferred embodiments of the present invention will be described in detail with reference to the accompanying drawings.

Fig. 3A is a block diagram of a transmitting unit in accordance with an embodiment of the present invention.

An original signal to be transmitted goes through transmission signal processing, for example, encoding, interleaving, etc. by a transmission processor 31. The function of the transmission processor 31 is well known to ordinary one skilled in the art, therefore, detailed description will be skipped.

After the transmission signal processing is performed, the signal is modulated by a pseudo noise (PN) modulator 32. In the whole process before transmitting signals through an

antenna, processing time delay is inevitable. In order to compensate the processing delay, a parameter, a transmission time advance fine adjust value Tx_Fine_Adj is used. The PN modulator 32 performs PN modulation of the signal from the transmission processor 31 on the basis of the transmission time advance fine adjust value Tx_Fine_Adj from a transmission time fine adjuster 33. The PN modulated signal is up converted by a frequency up converter 34 and transmitted through an antenna.

The transmission time advance fine adjust value Tx_Fine_Adj is a parameter used for compensation of unavoidable time delay caused by the whole signal processing such as PN modulation, interleaving, frequency up converting and etc. In CDMA system, if a signal is delayed when the signal is PN modulated, the signal has a result in being advanced. Therefore, adjusting the transmission time advance fine adjust value Tx_Fine_Adj of the signal makes the signal possible to be acquired within the preamble access window.

If a preamble access window length is maximum, i.e., a chip length is 3072 and a cell radius is limited to 45 Km, a transmission time advance fine adjust value Tx_Fine_Adj is changed in order to expand the cell coverage in the present invention. The transmission time advance fine adjust value Tx_Fine_Adj is expressed as following:

25

$$Tx_Fine_Adj(\mu s) = \frac{Radius(Km) \times 2}{3 \times 10^5} \times 10^6 \quad [Eq.1]$$

Here, Radius is a length of the expanded radius and a speed of a radio wave is supposed to be equal to the speed of the light.

Fig. 3B is a diagram illustrating a method for

expanding a cell coverage using an adjusted transmission time and a delay element in accordance with an embodiment of the present invention.

As described above, if the preamble access window is shifted by the transmission time advance fine adjust value Tx_Fine_Adj , a mobile station (MS) at a remote distance can communicate with the BS. However, a MS at a short distance can fail to communicate with the BS. For preventing the MS at a short distance from failing in communication with the BS, a received signal is delayed by a delay 35 which is added in a receiving unit of the BS, such that the signal from the MS at a short distance is acquired within the preamble access window.

A delay amount of the delay 35 is expressed as following:

$$\text{Delay amount } (\mu s) = Tx_Fine_Adj(\mu s) = \frac{\text{Radius}(Km) \times 2}{3 \times 10^5} \times 10^6 \quad [\text{Eq. 2}]$$

A receiving unit having a delay in a reverse link is illustrated in Fig. 4.

Referring to Fig. 4, a signal from a remote distance is received by a receiving element Rx1 and a signal from a short distance is received by a receiving element Rx0 and delayed by a delay 31. Therefore, the signal from a short distance can be acquired by a shifted access window by adjusting the transmission time advance fine adjust value Tx_Fine_Adj . The signals from the MSs at the short distance and the remote distance are combined in a diversity combiner 36 and performed a receiving processing by a receiving processor 37, which is well known to ordinary one skilled in the art, for example deinterleaving, decoding, etc.

Therefore, a detailed description of the receiving processor 37 will be skipped in here.

Fig. 5 is a flow chart illustrating a method for expanding a cell coverage in accordance with an embodiment 5 of the present invention.

In this embodiment, a signal from a MS at a remote distance further than 5 Km is acquired by shifting back a window for access probe. In this embodiment, though a round trip delay (RTD) of a signal is larger than 45 Km, the 10 window for the access probe can acquire the signal. Here, a signal from the MS at the short distance cannot be acquired because of shifting the access probe window. Therefore, The signal from the short distance is delayed by a delay 31 in Fig. 4, thereby being accessed to the access probe window.

15 In order to expand a cell radius limited to 45Km in a general CDMA system, first, a preamble access window length is set as a maximum value, i.e. 3072 at step 501. In this embodiment, the preamble access window length should not have a maximum value, however, for expanding the cell 20 coverage, the preamble access window length is preferred to be set as a maximum value.

At step 502, the preamble access window is shifted by setting parameters related with time advance, e.g., the preamble PN offset PRA_PN_Offset and the transmission time 25 advance fine adjust value Tx_Fine_Adj. The transmission time advance fine adjust value Tx_Fine_Adj for a call connection is set as the equation 1.

The proceed continues to step 503 to determine whether a round trip delay (RTD) of the received signal from the MS 30 is acquired within the preamble access window for the access probe of the system.

If the RTD of the received signal is not acquired, in

other words, if the MS is a short distance from the BS, the received signal is delayed by the delay 35 in the receiving unit Rx0 at step 504. Then, the delayed received signal is acquired within the preamble access window and accessed at
5 step 506.

If the RTD of the received signal is acquired, in other words, if the MS is a remote distance from the BS, the signal received by the receiving unit Rx1 without delay is used for the preamble access at step 505 and then is
10 acquired within the preamble access window and accessed at step 506.

As described above, if the preamble access window is shifted, a signal from a remote distance can be acquired preamble access window within the preamble access window. By
15 delaying a signal from a MS at a short distance, which is not acquired, the signal can be acquired within the preamble access window.

However, when expanding the cell coverage by using a general delay, the cell coverage is expanded as larger, as
20 more delays are necessary in accordance with the distance between a point in the cell and a point on the cell radius. If there is no necessary number of delays, a probability of call setup fail can increase. Therefore, a method to solve this problem will be described in another embodiment of the
25 present invention.

Figs. 6A and 6B are block diagrams of receiving units having a feedback delay in accordance with other embodiments of the present invention.

Referring Fig. 6A, a signal from a MS at a remote
30 distance is received by a receiving element Rx1 and a signal from a short distance is received by a receiving element Rx0 and delayed by a feedback delay 61. A delay value of the

feedback delay 61 is set, the signal received by the receiving element Rx0 is delayed by a number received from a gain controller. The signal received through the receiving element Rx0 is delayed by the feedback delay number N (here, 5 N = 0, 1, 2, ...) and outputted to a diversity combiner 63.

Using the feedback delay 61, the cell coverage can be expanded limitlessly only if a forward or reverse transmission power is large enough. By adding a delay to the receiving element Rx1, a region in which most of mobile 10 stations are gathered can be covered, thereby providing a stable call.

The signals received by the receiving elements Rx0 and Rx1 are combined in a diversity combiner 63, demodulated by a channel demodulator 64 and performed a receiving 15 processing by a receiving processor 65, which is well known to ordinary one skilled in the art, for example deinterleaving, decoding, etc. Therefore, a detailed description of the receiving processor 37 will be skipped in here..

Referring to Fig. 6B, there is a different receiving 20 element from the receiving unit of Fig. 6A. The receiving unit has the same constitution as one in Fig. 6A except that there is one receiving element Rx. Therefore, detailed description about the receiving unit in Fig. 6B will be 25 skipped.

Figs. 7A to 7C are explanative diagrams illustrating a method for expanding a cell coverage by using a feedback delay in accordance with another embodiment of the present invention.

Referring to Fig. 7A, a cell coverage is illustrated 30 when there is no delay in the receiving unit of the base station. Referring to Figs. 7B and 7C, cell coverages

respectively expanded by 90 Km and 135 Km are illustrated. The cell coverage is expanded by controlling parameters for the base station, e.g., the preamble PN offset PRA_PN_offset and the transmission time advance fine adjust value Tx_Fine_Adj and delaying the received signal by using a delay such as the delay 31 described in Fig. 3.

Referring to Fig. 7C, the cell coverage is expanded by 90 Km or more than 90 Km. Since one delay element can delay only the signal between 0 and 45 Km, the signal between 45 Km and 90 Km cannot be acquired within the preamble access window.

Therefore, the signal in a range from 0 to 45 Km has a different delay value from the signal in a range from 45 to 90 Km. In order to solve this problem, use of a feedback delay such like in Fig. 6A is preferred than use of a plurality of delay elements. The feedback delay having a minimum delay value is placed in the receiving unit and the received signal is delayed by N numbers of the minimum delay value, and then the signal has a delay value to be wanted.

In case described above referring to Fig. 7C, a delay value which a signal in a range from 45 to 90 Km should have is set as a delay value of the feedback delay. A signal in a range from 90 to 135 Km is passed without delay, the signal in a range from 45 to 90 Km is delayed by one time and a signal in a range from 0 to 90 Km is delayed by two times, the signals in whole of the cell coverage can be acquired.

Fig. 8 is a flow chart illustrating a method for expanding a cell coverage by using a feedback delay.

Referring to Fig. 8, a delay value of a feedback delay and a number N of feedback are initialized as '0' at step 801. A preamble access window length is set as a maximum value, i.e. 3072, at step 501, the cell coverage is expanded

as 45 Km. In this embodiment, the preamble access window length should not have a maximum value, however, for expanding the cell coverage, the preamble access window length is preferred to be set as a maximum value.

5 After expanding the cell coverage at step 802, the preamble access window is shifted by setting parameters related with time advance, e.g., the preamble PN offset PRA_PN_Offset and the transmission time advance fine adjust value Tx_Fine_Adj at step 803. The transmission time advance
10 fine adjust value Tx_Fine_Adj for a call connection is set as the equation 1.

A signal from the mobile station (MS) is received by the receiving elements Rx0 and Rx1 in the base station at step 804. The signal received by the receiving element Rx1
15 is passed and transmitted to the diversity combiner. The signal received by the receiving element Rx0 is delayed in the feedback delay by a certain time, in this embodiment about 20 μ s at step 805. The signal delayed by the feedback delay is repeatedly delayed responsive to a control signal
20 from the gain controller at step 805. The gain controller controls that the gain of the received signal becomes equal to a reference gain.

The proceed continues to step 806 to determine whether a round trip delay (RTD) of the received signal from the MS
25 is acquired within the preamble access window for the access probe of the system.

If the RTD of the received signal is acquired, a call is setup at step 807. If not, a call is not setup at step 808.

30 Using the apparatus and method in accordance with the present invention, the cell coverage can be expanded without additional equipment in an area in which a base station is

difficult to be established, e.g., sea and mountains, thereby the cost for establishing system can be reduced. Also, even though the cell radius is very large, there is no need to use a plurality of delay elements and only one
5 feedback delay is necessary to be used. Therefore, the cost can be considerably reduced.

Although the preferred embodiments of the invention have been disclosed for illustrative purpose, those skilled in the art will appreciate that various modifications,
10 additions and substitutions are possible, without departing from the scope and spirit of the invention as disclosed in the accompanying claims.

Claims

1. A method for expanding cell coverage in mobile communication system comprising the steps of:

- 5 a) shifting a preamble access window by advancing a transmission signal by a first delay time in order to acquire a first call access signal from a mobile station at a remote distance; and
- b) delaying a second call access signal from a mobile
10 station at a short distance by a second delay time in order to acquire the second call access signal.

2. The method as recited in claim 1, wherein said step
a) includes the step of expanding a length of the preamble
15 access widow to a maximum value by adjusting a length of chips included in the transmission signal.

3. The method as recited in claim 1, wherein said step
b) includes the steps of:
20 determining whether the second call access signal from the mobile station is acquired by the preamble access window; and

 accessing the second call access signal to the preamble access window by delaying the second call access signal if
25 the second call access signal is not acquired.

4. The method as recited in claim 1, wherein the first delay time is substantially equal to the second delay time.

30 5. The method as recited in claim 3, wherein the second call access signal is delayed by a feedback delay.

6. A method for expanding cell coverage in mobile communication system including at least a base station and a plurality of mobile stations, the method comprising the steps of:

- 5 a) expanding a length of a current preamble access window to a predetermined value;
- b) determining the mobile station is within a cell coverage covered by the preamble access window;
- c) shifting the preamble access window by advancing a
10 transmission signal by a first delay time in order to acquire at least a mobile station when the mobile station is out of the cell coverage; and
- d) delaying a second call access signal from a mobile
15 station at a short distance in order to acquire the second call access signal.

7. The method as recited in claim 6, wherein said step d) includes the steps of:

- determining whether the second call access signal is
20 acquired by the preamble access window; and
- accessing the second call access signal to the preamble access window by delaying the second call access signal if the second call access signal is not acquired.

25 8. The method as recited in claim 6, wherein the first delay time is substantially equal to the second delay time.

 9. The method as recited in claim 7, wherein the second call access signal is delayed by a feedback delay.

30

10. An apparatus for expanding cell coverage in mobile communication system including a plurality of mobile

stations and at least a base station, comprising:

transmitting means for transmitting a transmission
signal advanced by a first delay time in order to acquire
the transmission signal from a mobile station at a remote
5 distance; and

receiving means for receiving and delaying a received
signal from a mobile station at a short distance by a second
delay time in order to acquire the received signal.

10 11. The apparatus as recited in claim 10, wherein said
transmitting means includes:

means for generating a call access signal;

means for modulating the first call access signal on
basis of pseudo noise signal and generating the transmission
15 signal; and

means for advancing the transmission signal by the
first predetermined time by controlling the pseudo noise
signal.

20 12. The apparatus as recited in claim 10, wherein said
receiving means includes:

means for delaying the received signal by a first
predetermined time; and

means for demodulating the delayed received signal and
25 restoring the call access signal.

13. The apparatus as recited in claim 10, wherein the
first delay time is substantially equal to the second delay
time.

30

14. The apparatus as recited in claim 12, wherein the
second call access signal is delayed by a feedback delay.

15. A method for expanding cell coverage applied to a mobile communication system, the method comprising the steps of:

- 5 a) expanding a length of a current preamble access window to a maximum value;
- b) setting operation parameters related to time advance in order to acquire a first call access signal from a mobile station at a remote distance when the mobile
- 10 station is out of the cell coverage; and
- c) acquiring a second call access signal from a mobile station at a short distance within the preamble access window by delaying the second call access signal.

- 15 16. The method as recited in claim 15, wherein said step c) includes the steps of:

- determining whether the second call access signal is acquired within the preamble access window;
- accessing the second call access signal to the preamble
- 20 access window by delaying the second call access signal if the second call access signal is not acquired; and
- accessing the second call access signal to the preamble access window if the second call access signal is acquired.

- 25 17. The method as recited in claim 16, wherein the operation parameters include a preamble pseudo noise off set used for expanding the cell coverage.

18. The method as recited in claim 16, wherein the
- 30 operation parameters include a transmission time advance fine adjust value used for expanding the cell coverage.

19. A method for expanding cell coverage applied to a mobile communication system, the method comprising the steps of:

- 5 a) expanding a length of a current preamble access window for access probe to a maximum value;
- b) shifting the preamble access window by setting operation parameters in order to acquire a first call access signal from a mobile station at a remote distance when the mobile station is out of the expanded preamble
- 10 access window; and
- c) acquiring a second call access signal from a mobile station at a short distance within the preamble access window by delaying the second call access signal by a feedback delay which makes the second call access signal
- 15 have a different delay value on basis of a distance between a location of the mobile station and a location on a cell radius.

20 20. The method as recited in claim 19, wherein said step a) includes the steps of:

initializing a delay value and a number of delay of the feedback delay; and

setting the length of the preamble access window as a maximum value.

25

21. The method as recited in claim 19, wherein the cell radius is expanded 45 Km or more in said step b).

22. The method as recited in claim 19, wherein said

30 step c) includes the steps of:

receiving the second call access signal;

delaying the second call access signal for a

predetermined time by feeding back the second call access signal by a certain number;

determining whether the second call access signal or the delayed signal are acquired within the preamble access
5 window;

performing a call access if the second call access signal or the delayed second call access signal is acquired within the preamble access window; and

stopping a call access if not.

10

23. The method as recited in claim 22, wherein the operation parameters include a preamble pseudo noise offset used for expanding the cell coverage.

15 24. The method as recited in claim 22, wherein the operation parameters include a transmission time advance fine adjust value used for expanding the cell coverage.

25 25. The method as recited in claim 22, wherein the second call access signal is substantially delayed for 20 μ s by the feedback delay.

26. A computer readable media storing a method for expanding cell coverage applied to a mobile communication
25 system, the method comprising the steps of:

a) expanding a length of a current preamble access window to a maximum value;

b) setting operation parameters in order to acquire a first call access signal from a mobile station at a remote
30 distance when the mobile station is out of the cell coverage; and

c) acquiring a second call access signal from a mobile

station at a short distance within the preamble access window by delaying the second call access signal.

27. A computer readable media storing a method for
5 expanding cell coverage applied to a mobile communication system, the method comprising the steps of:

a) expanding a length of a current preamble access window for access probe to a maximum value;

b) shifting the preamble access window by setting
10 operation parameters in order to acquire a first call access signal from a mobile station at a remote distance when the mobile station is out of the expanded preamble access window; and

c) acquiring a second call access signal from a mobile
15 station at a short distance within the preamble access window by delaying the second call access signal by a feedback delay which makes the second call access signal have a different delay value on basis of a distance between a location of the mobile station and a location on a cell
20 radius.

FIG. 1

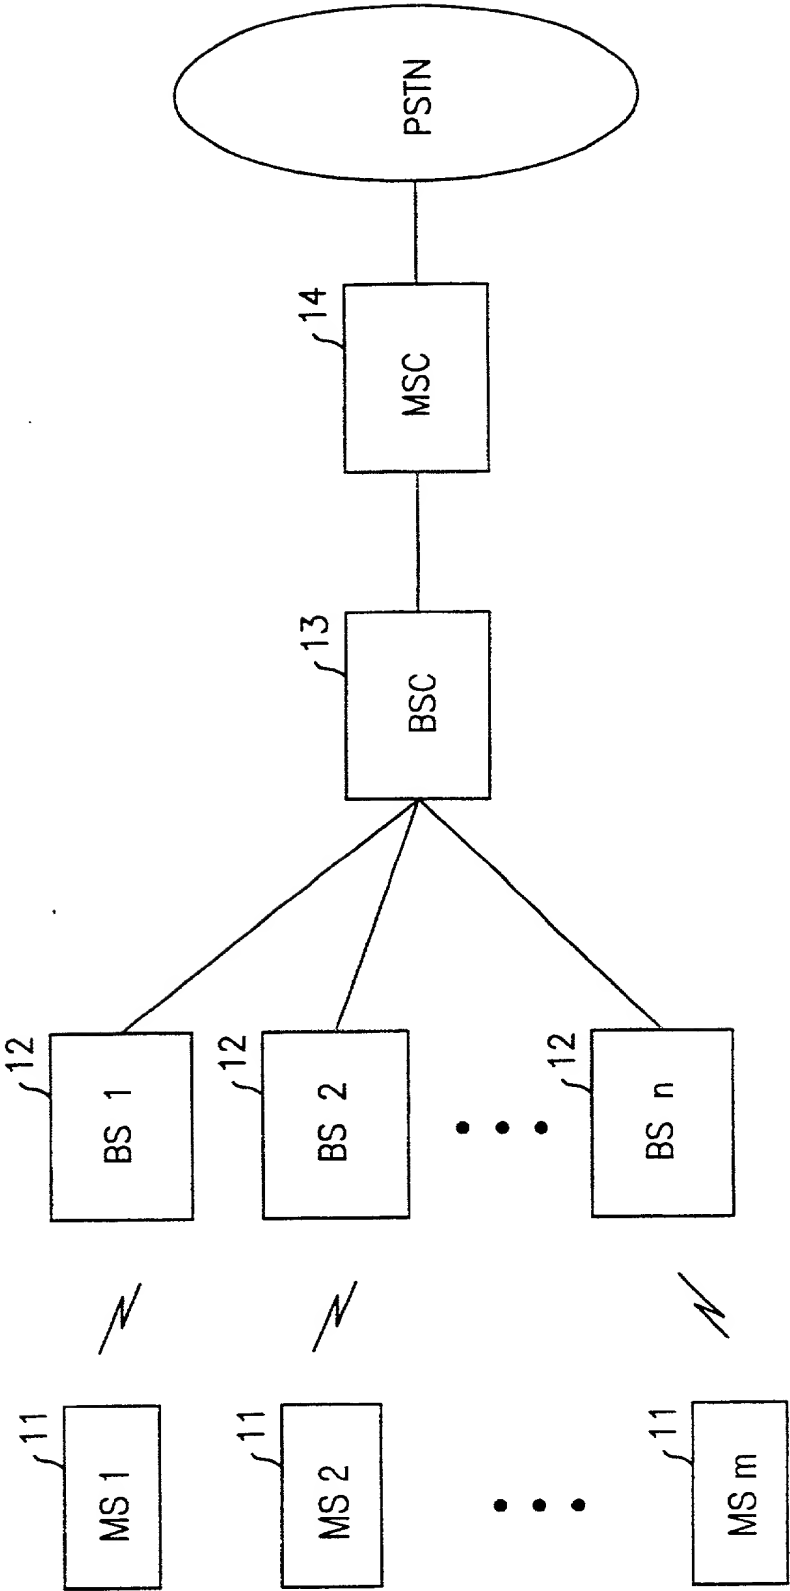


FIG. 2

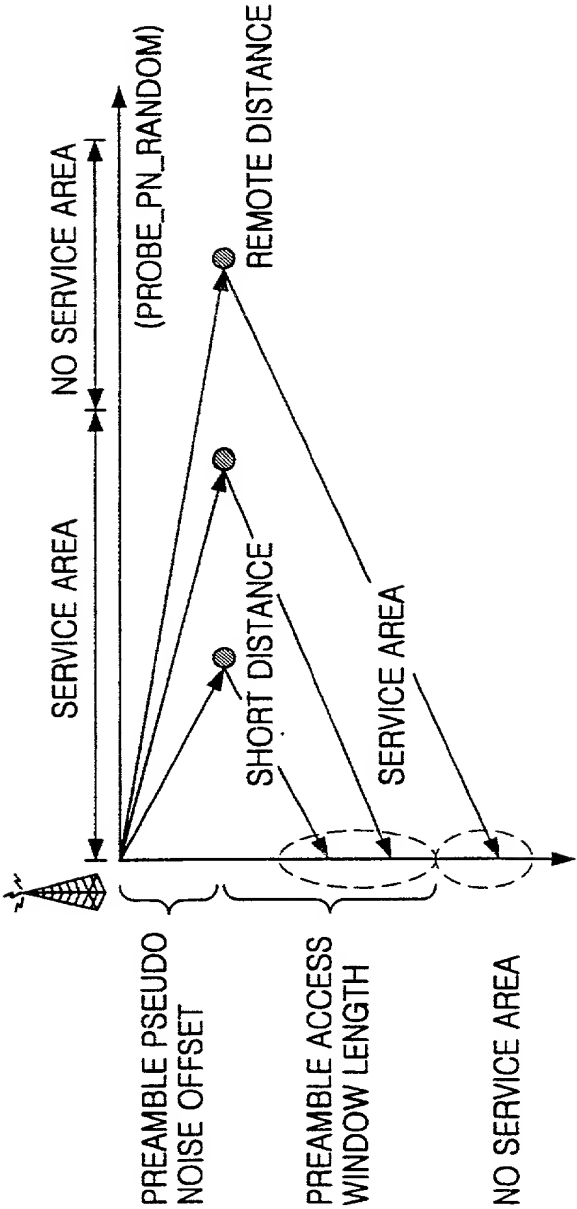


FIG. 3A

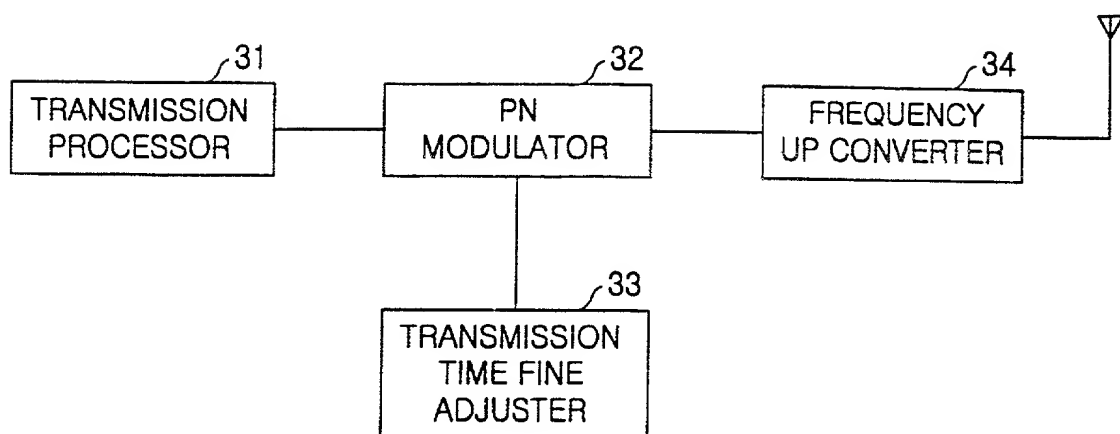


FIG. 3B

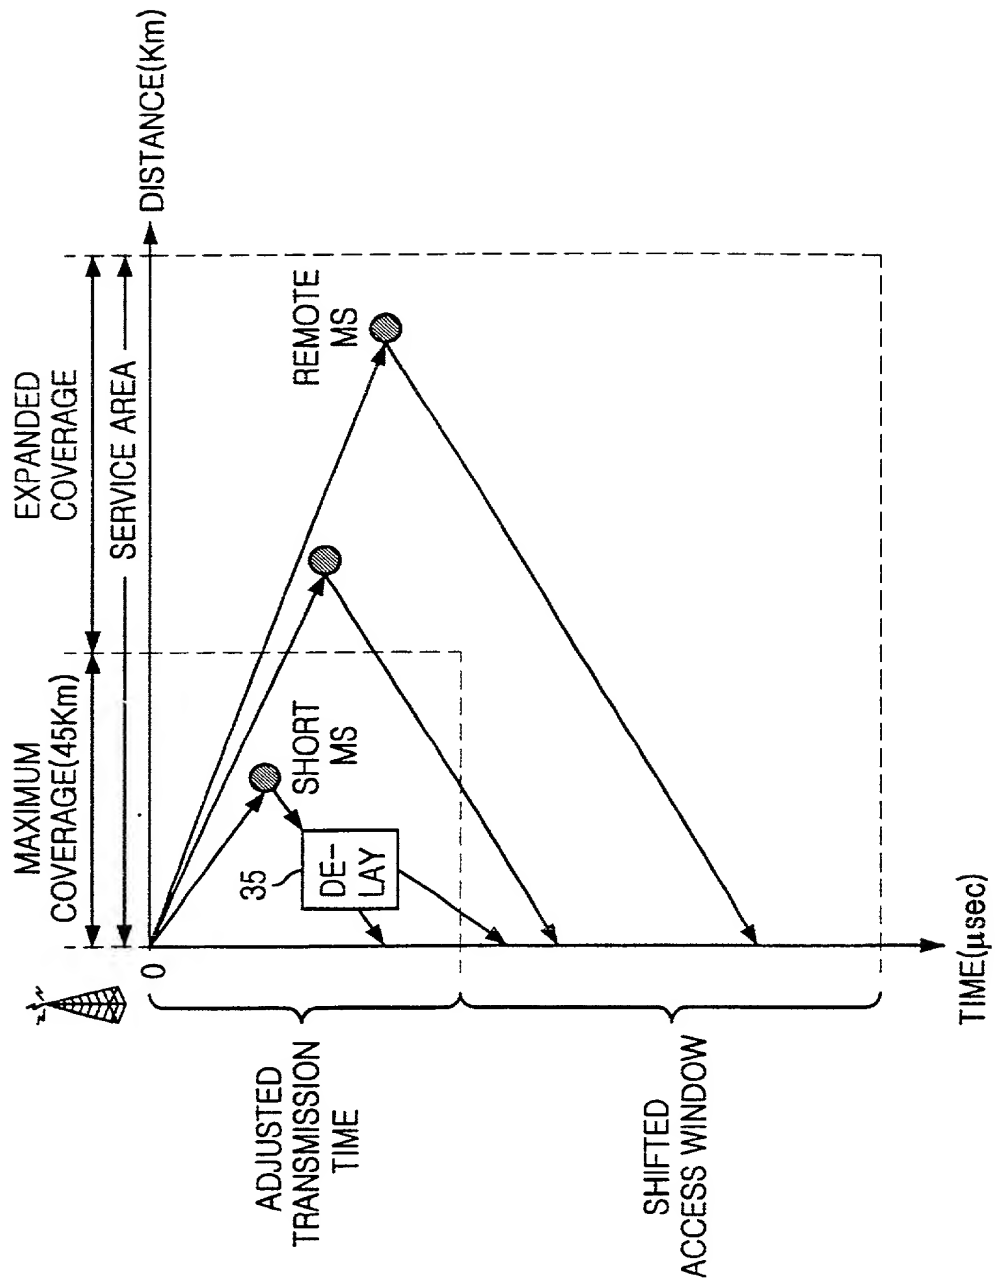


FIG. 4

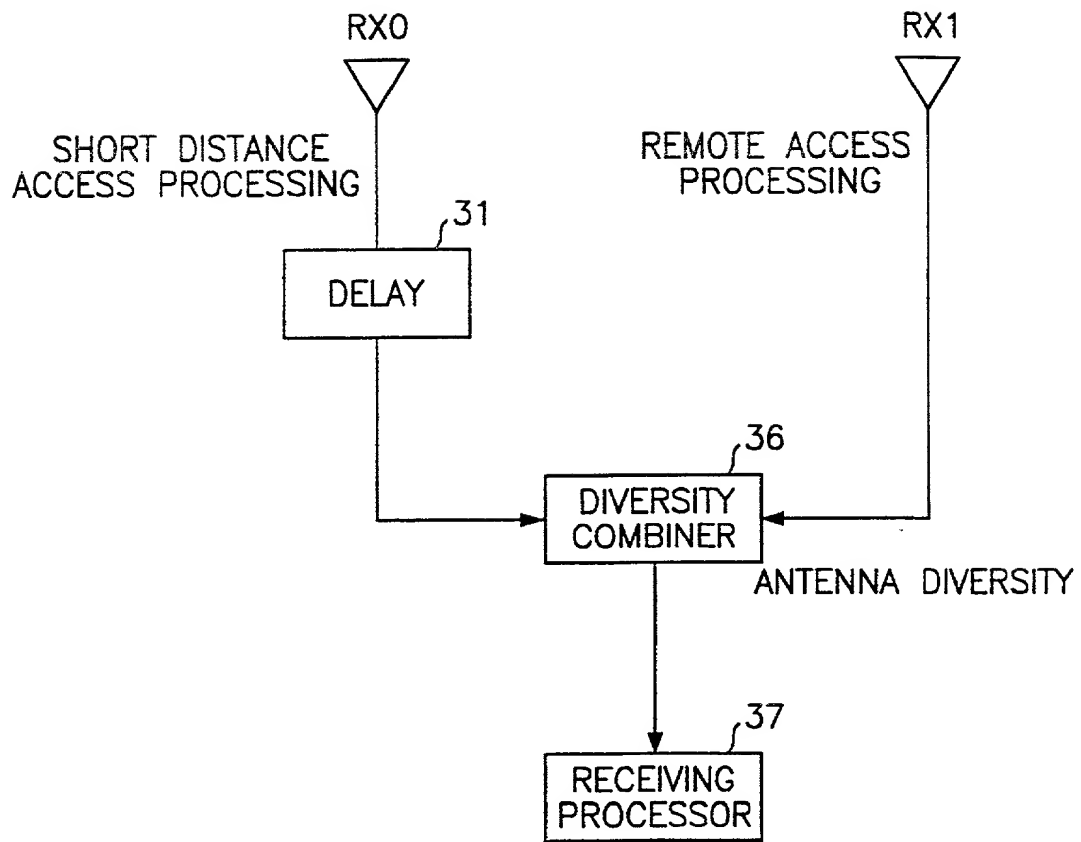


FIG. 5

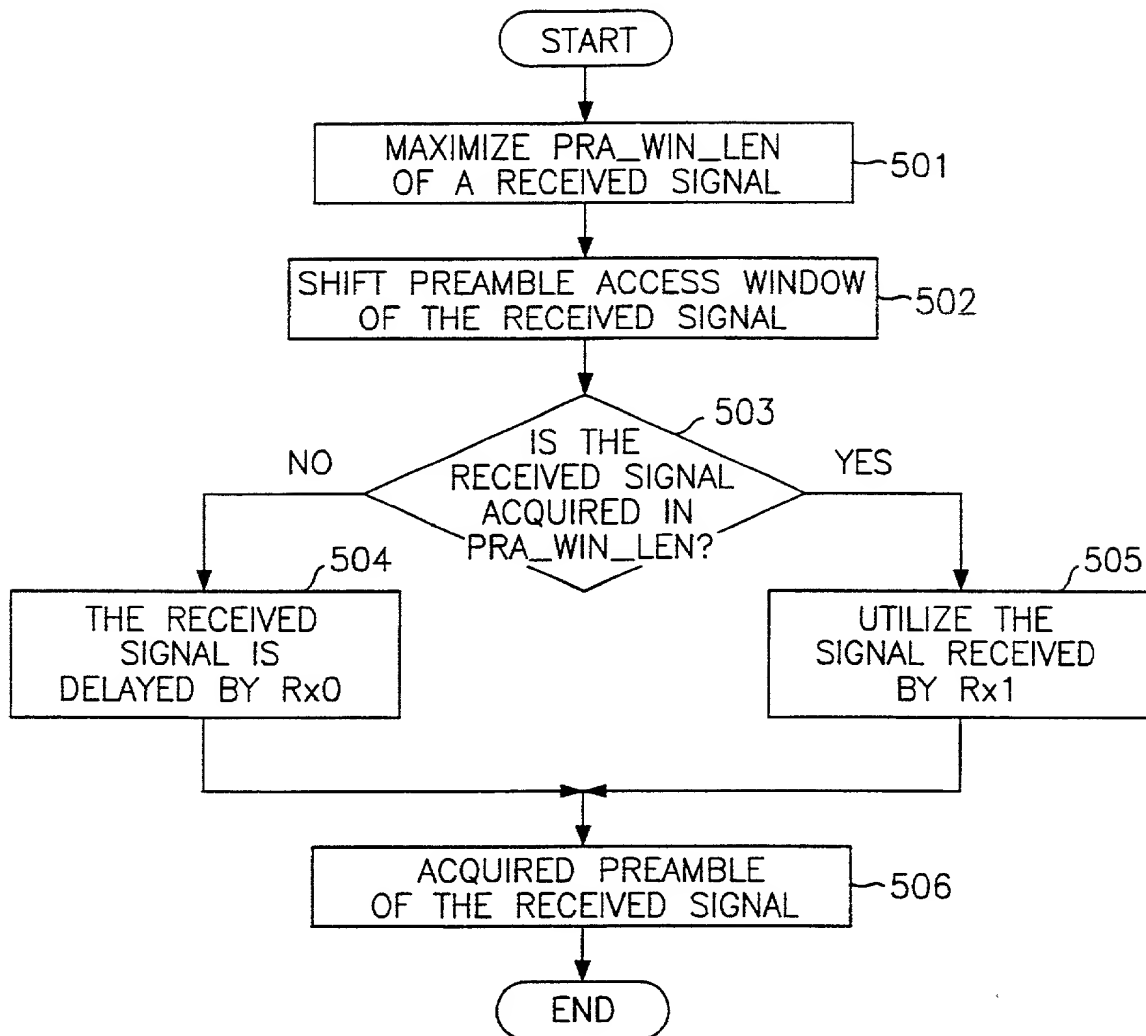


FIG. 6A

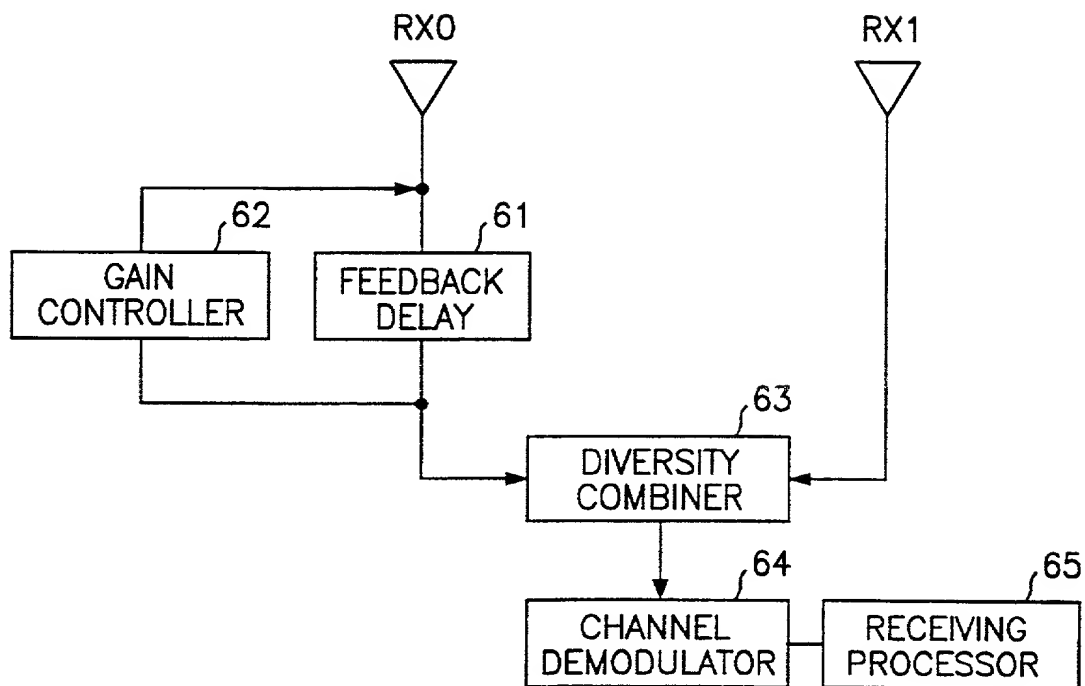


FIG. 6B

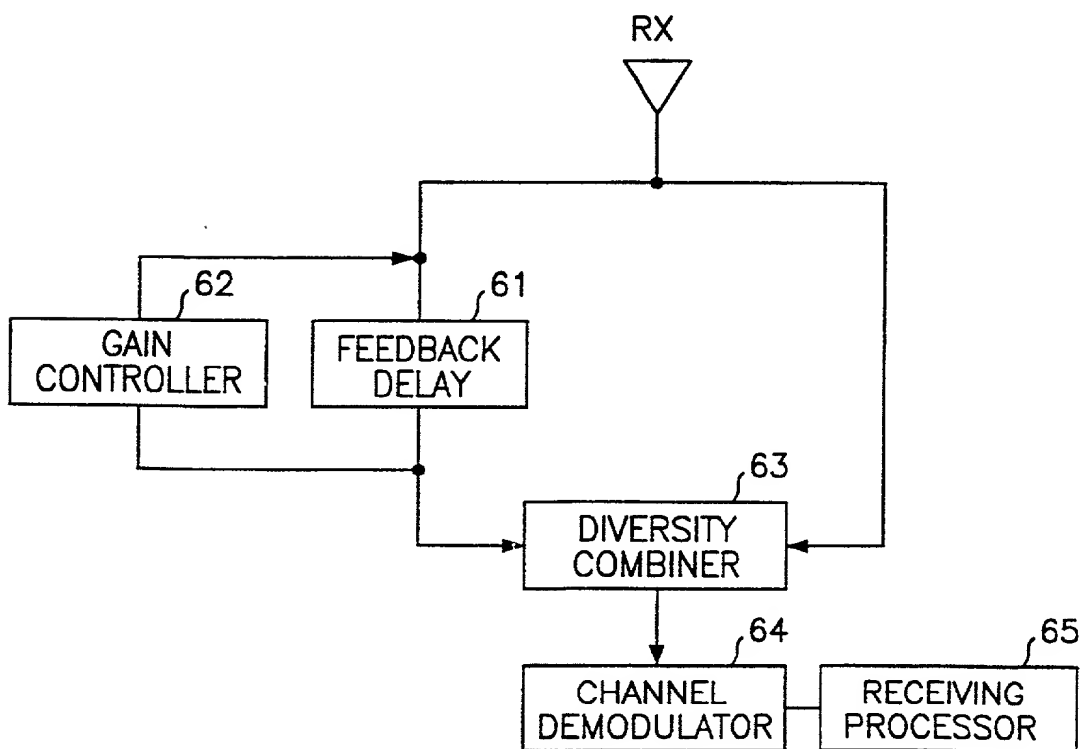


FIG. 7A

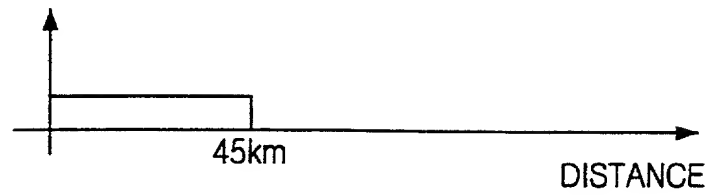



FIG. 7B

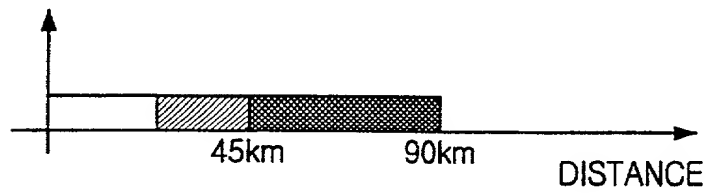
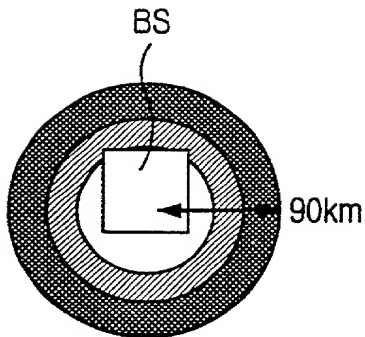


FIG. 7C




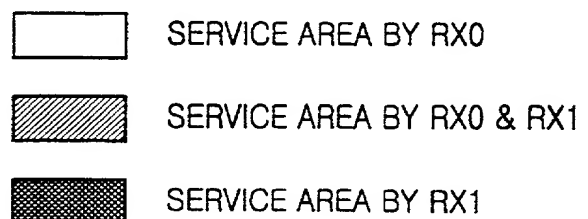


FIG. 8

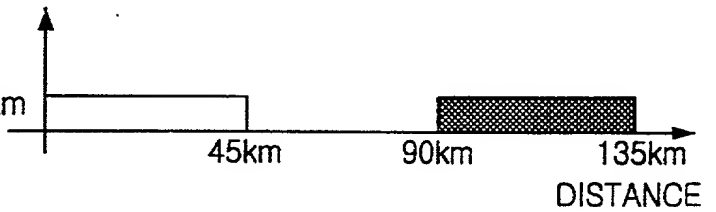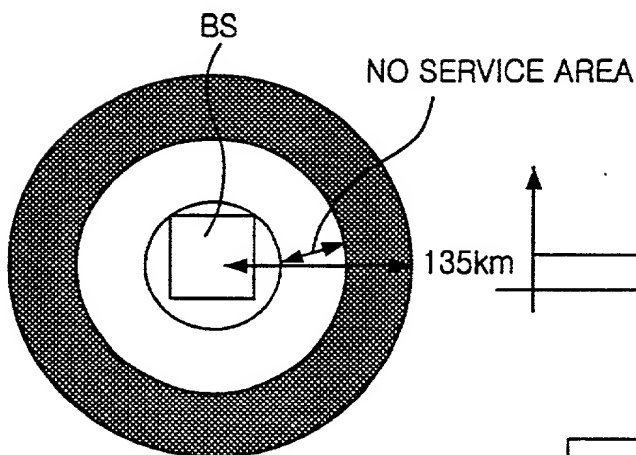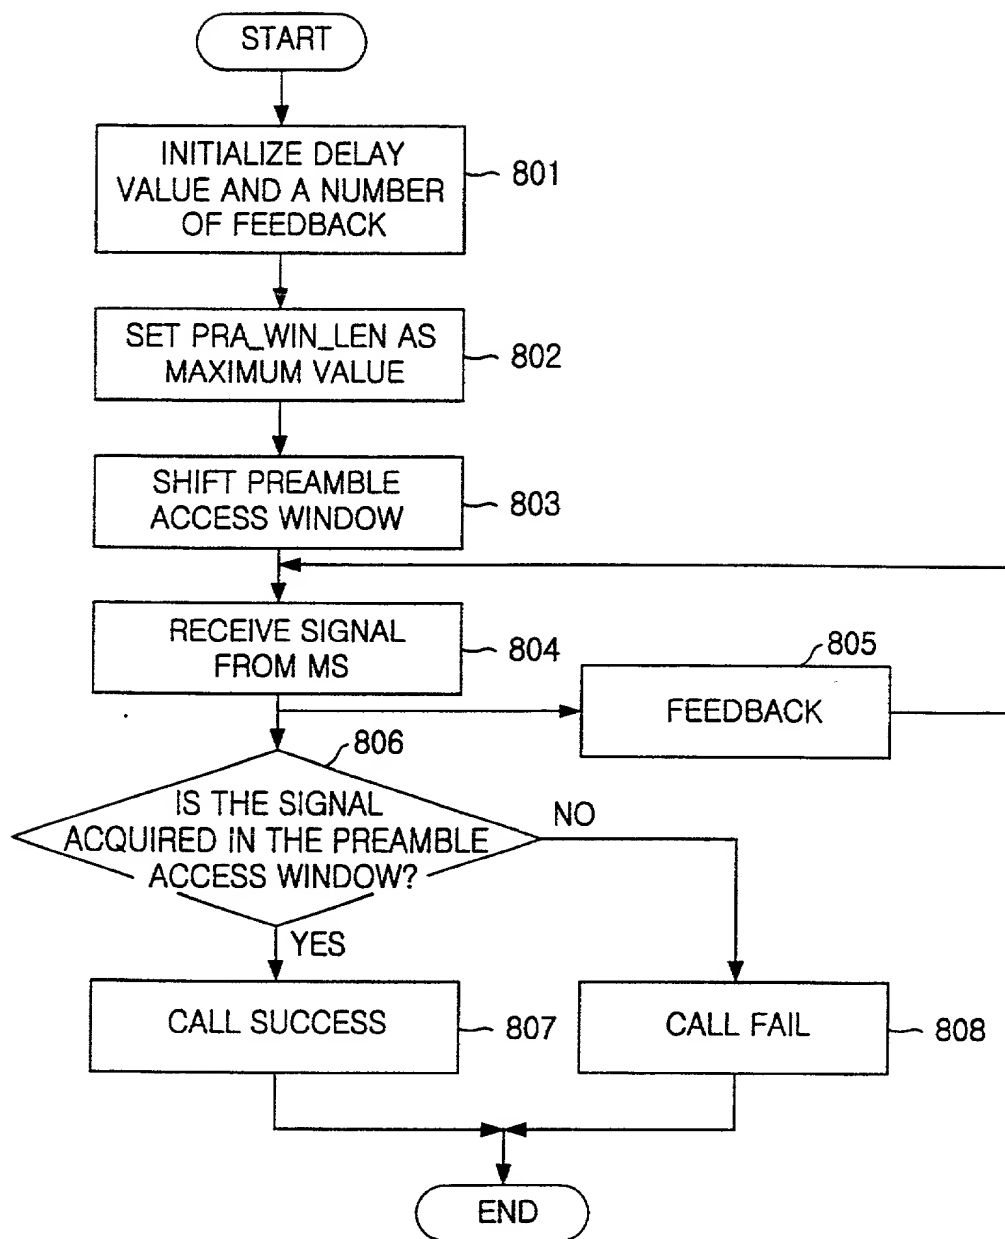

DECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below, next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled **METHOD AND APPARATUS FOR EXPANDING CELL**

COVERAGE IN MOBILE COMMUNICATION SYSTEM

the specification of which

☒ is attached hereto.

was filed on _____ as _____

Application Serial No: _____

and was amended on _____

(if applicable)

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above. I do not know and do not believe that the same was ever known or used in the United States of America before my invention thereof, or patented or described in any printed publication in any country before my invention thereof or more than one year prior to this application, that the same was not in public use or on sale in the United States of America more than one year prior to this application, and that the invention has not been patented or made the subject of an inventor's certificate issued before the date of this application in any country foreign to the United States of America on an application filed by me or my legal representatives or assigns more than twelve months prior to this application.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, Section 1.56(a).

I hereby claim foreign priority benefits under Title 35, United States Code, Section 119, of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)			Priority Claimed	
1998-53725	REPUBLIC OF KOREA	08 / 12 / 1998	<input checked="" type="checkbox"/>	
(Number)	(Country)	(Day/Month/Year Filed)	Yes	No
1999-32389	REPUBLIC OF KOREA	06 / 08 / 1999	<input checked="" type="checkbox"/>	
(Number)	(Country)	(Day/Month/Year Filed)	Yes	No
(Number)	(Country)	(Day/Month/Year Filed)	Yes	No

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, Section 112 I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, Section 1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

PCT/KR99/00765	December 8, 1999	PENDING
(Application Serial No.)	(Filing Date)	(Status -- patented, pending, abandoned)
(Application Serial No.)	(Filing Date)	(Status -- patented, pending, abandoned)

I hereby appoint BLAKELY, SOKOLOFF, TAYLOR & ZAFMAN, a firm including: Bradley J. Berezna, revocation, to prosecute this application and to transact all business in the Patent and Trademark Office connected herewith.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

1-00
Full Name of Sole/First Inventor LEE, JUN-WOO

Inventor's Signature [Signature]

Date 08/03/00

Residence SEOUL, KOREA

(City, State)

KRX

Citizenship REPUBLIC OF KOREA

(Country)

Post Office Address #303-2402 DAKRIM-APT., SHINDORIM-DONG, KURO-KU, 152-070 SEOUL, KOREA

2-00
Full Name of Second/Joint Inventor KO, BYUNG-JIN

Inventor's Signature [Signature]

Date 08/02/00

Residence SEOUL, KOREA

(City, State)

KRX

Citizenship REPUBLIC OF KOREA

(Country)

Post Office Address #320-1010 HANSHIN-APT., CHAMWON-DONG, SEOCHO-KU, 137-030 SEOUL, KOREA

3-00
Full Name of Third/Joint Inventor JUNG, HA-JAE

Inventor's Signature [Signature]

Date 08/03/00

Residence NAMYANGJU-SHI, KYOUNGKI-DO

(City, State)

KRX

Citizenship REPUBLIC OF KOREA

(Country)

Post Office Address #103-1503 HYUNDAI-APT., 816-3 YONGJEONG-RI, JINGEON-MYUN,

NAMYANGJU-SHI, 472-830 KYOUNGKI-DO, KOREA

4-00
Full Name of Fourth/Joint Inventor HONG, SUNG-CHEOL

Inventor's Signature [Signature]

Date 08/03/00

Residence ANYANG-SHI, KYOUNGKI-DO

(City, State)

KRX

Citizenship REPUBLIC OF KOREA

(Country)

Post Office Address #203-1004 KEUMHO-APT., HOKYE-DONG, DONGAN-KU, ANYANG-SHI, 431-080

KYOUNGKI-DO, KOREA

5-00
Full Name of Fifth/Joint Inventor SIM, SEON-HO

Inventor's Signature [Signature]

Date 08/03/00

Residence SEOUL, KOREA

(City, State)

KRX

Citizenship REPUBLIC OF KOREA

(Country)

Post Office Address #806 KUNGJEON-APT., 127-1 SHINWOL 1-DONG, YANGCHEON-KU,

158-091 SEOUL, KOREA